

TwistPort™ Adaptor for RouterBoard RBP

ADAPTOR FOR MIKROTIK ROUTERBOARD

The TwistPort™ Adaptor RBP enables compatibility of the 4-, 7-, 9-, and M11 series with all TwistPort™ antennas. TPA RBP is equipped with improved feeder structure achieving excellent rf performance in wide frequency band.



TECHNICAL DATA

Antenna Connection	TwistPort™ - Quick Locking Waveguide Port
Radio Connection	2x Right Angle MMCX on RG316 cable
Materials	Insert - Aluminium Alloy Body - UV stabilized and weather resistant ABS plastic
Temperature	-40°C to +60°C (-40°F to +140°F)
Wind Survival	160 km/h
Weight	0.4 Kg / 0.9 lbs – single unit 0.6 Kg / 1.3 lbs – single unit incl. package 12.6 Kg / 27.7 lbs – carton (20 units)
Single Unit	Retail Box: 21.3 × 15.3 × 9.0 cm
20 Units	Carton Box: 49 × 33 × 46 cm

PERFORMANCE

Frequency Range	5180 - 6400 MHz
Polarization	Dual Linear H + V
VSWR Max	1.8
Impedance	50 Ohm


COMPATIBLE WIRELESS PLATFORMS

RF elements®	any TwistPort™ Antenna
MikroTik™	RouterBoard™ RBM11G*, RB411L*, RB71x, RB91x*, RB92x*

PACKAGE CONTENTS

TwistPort™ Adaptor Body
TwistPort™ Adaptor Sticker
Screw 2,9x6,5 mm (4pcs)

PRODUCT DIMENSIONS

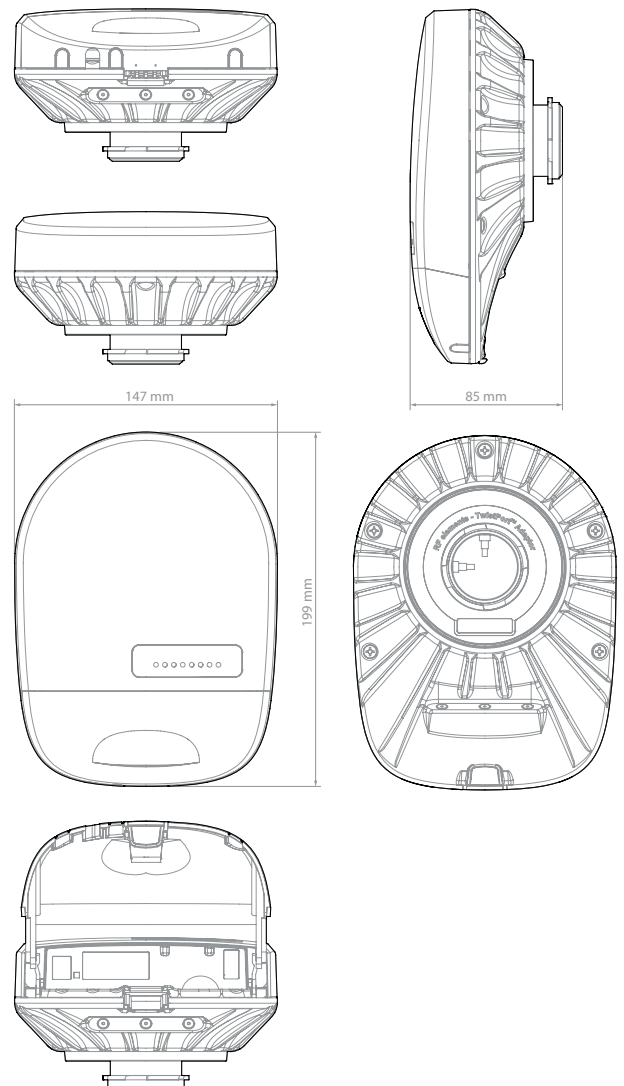

*Ensure the radio module size fits.

TwistPort™ Adaptor Rev OCT-2018

RF elements® and TwistPort™ are trademarks of RF elements s.r.o., Humenne, Slovakia.
All rights of respective trademark owner reserved.
© RF elements 2018